





4 x 13 EXTRA-FLOW PRODUCT DATA SHEET

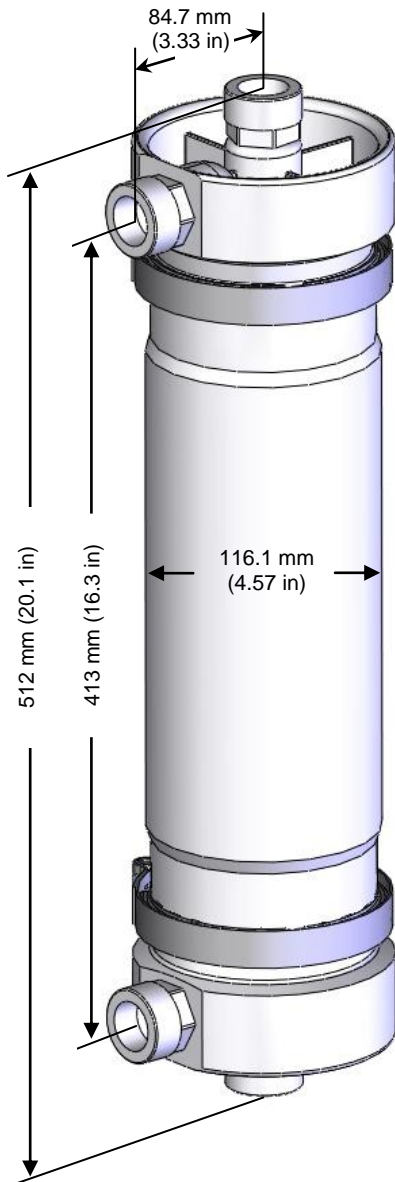

Note: All dimensions are nominal values for the Polypropylene vessel with NPT connections. Dimensions for other housings are at www.liqui-cel.com.

Membrane Characteristics			
Cartridge Configuration	Extra-Flow with Center Baffle		
Liquid Flow Guidelines	0.7– 3.41 m ³ /hr (3–15 gpm)		
Membrane Type	X50	X40	
	Recommended for CO ₂ removal from water	Recommended for all other gas transfer applications	
Membrane/Potting Material	Polypropylene / Polyethylene		
Typical Membrane Surface Area	8.1 m ² (87 ft ²)		
Priming Volume (approximate)			
Shellside	1.26 liters (0.33 gal.)		
Lumenside	0.61 liters (0.16 gal.)		
Pressure Guidelines*			
	PP X50 or X40	316L SS X50	316L SS X40
Maximum Shellside LIQUID Working Temperature/ Pressure	5-30° C, 7.2 bar (41-86° F, 105 psig) 40° C, 5.2 bar (104° F, 75 psig)	5-50° C, 7.2 bar (41-122° F, 105 psig) 70° C, 2.1 bar (158° F, 30 psig)	5-50° C, 9.3 bar (41-122° F, 135 psig) 70° C, 2.1 bar (158° F, 30 psig)
If no vacuum is used, 1.05 bar (15 psig) can be added to pressures above.			
Maximum Applied Gas Pressure	4.1 bar (60 psig) for PP	6.2 bar (90 psig) for SS	
Max applied gas pressure is for integrity testing at ambient temperatures. Normal operating pressures are typically lower.			
*See Operating Guide for complete temp/pressure limits for housings and membrane. Note: Liquid pressure should always exceed gas pressure.			
Housing Options & Characteristics			
Material	Polypropylene	316L SS Vessel and End Caps ≤ 0.8µm SI (32RA).	
Flange Connections			
Shellside (Liquid Inlet/Outlet)	<ul style="list-style-type: none"> • 1 inch Sanitary • ¾ inch NPT Female • 1 inch GF • Rc ¾ per JIS B0203 	<ul style="list-style-type: none"> • 1 inch Sanitary 	
Lumenside (Gas/Vacuum)	<ul style="list-style-type: none"> • 1 inch 90° Sanitary • ¾ inch 90° NPT Female • Rc ¾ per JIS B0203 	<ul style="list-style-type: none"> • 1 inch Sanitary 	
Seal Options			
Material	Applications		
Viton	General Purpose		
K-UPW	Ultra Pure Water		
K-EXT	Chemical Extraction		
Buna-N	Beverage		
Weight	PP	316L SS	
Dry weight	2.6 kg. (5.8 lbs.)	4.9 kg (10.7 lbs.)	
Liquid full (shellside)	3.7 kg. (8.2 lbs.)	7.4 kg (16.4 lbs.)	
Shipping Weight	3.3 kg. (7.3 lbs.)	6.4 kg (14.0 lbs.)	
Regulatory			
Meets RoHS threshold limits. Complies with the PED 97/23/EC and is manufactured with sound engineering practice. CFR Title 21 compliant at and below ambient temperatures.			

4 x 13 EXTRA-FLOW PRODUCT DATA SHEET

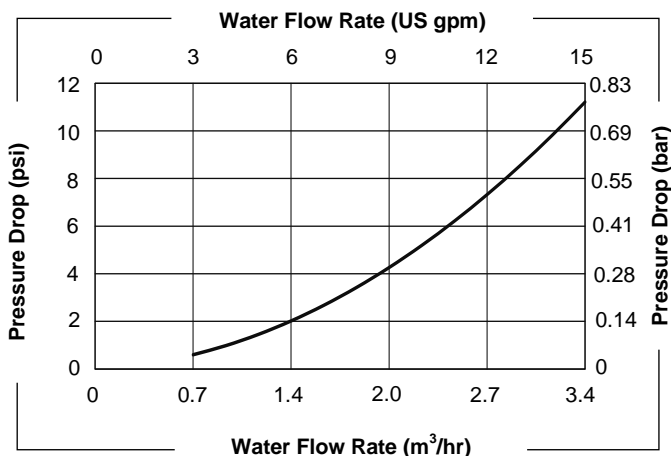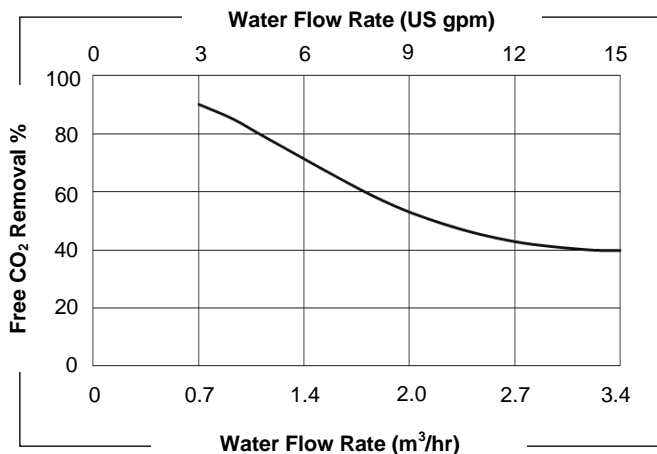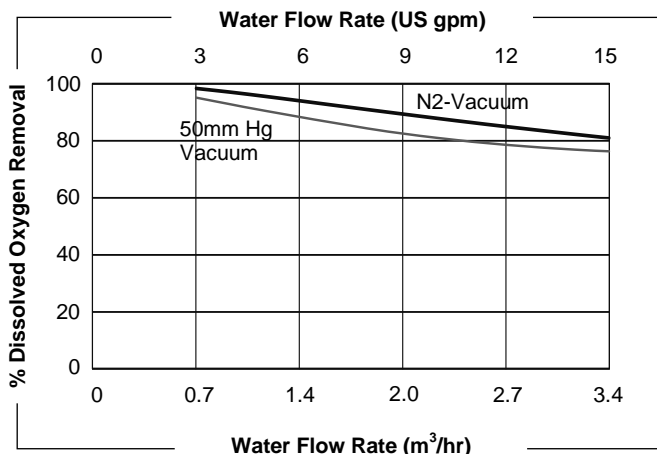

Cartridge Specifications		
Characteristics	Test Conditions	Specifications
Performance O ₂ Removal	Shellside water flow: 2.7 m ³ /hr (12 gpm) 20°C (68°F) Lumenside N ₂ Flow: 1.7 m ³ /hr (1 ft ³ /min), 1.0 atm at 20°C	77% minimum
Pressure Drop	Shellside water flow: 2.7 m ³ /hr (12 gpm), 20°C (68°F)	0.59 bar (8.5 psi) maximum

Curves represent nominal values, generated using water at 20°C (68°F). Characteristics may change under different operating conditions.

Test condition O₂ Removal with X40 membrane: N₂-vacuum combo mode, vacuum: 50 mm Hg, N₂ sweep: 1.4 L/min (0.05 scfm) at 20°C (68°F). Vacuum mode, vacuum: 50 mm Hg at 20°C.

Test condition CO₂ Removal with X50 membrane: N₂-vacuum combo mode, vacuum: 150 mm Hg, N₂ sweep 2.8 L/min (0.1 scfm) at 20°C (68°F).

This product is to be used only by persons familiar with its use. It must be maintained within the stated limitations. All sales are subject to Seller's terms and conditions. Purchaser assumes all responsibility for the suitability and fitness for use as well as for the protection of the environment and for health and safety involving this product. Seller reserves the right to modify this document without prior notice. Check with your representative to verify the latest update. To the best of our knowledge, the information contained herein is accurate. However, neither Seller nor any of its affiliates assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Determination of the suitability of any material and infringement of any third party rights, including patent, trademark, or copyright rights, are the sole responsibility of the user. Users of any substance should satisfy themselves by independent investigation that the material can be used safely. We may have described certain hazards, but we cannot guarantee that these are the only hazards that exist. Nothing herein shall be construed as a recommendation or license to use any information that conflicts with any patent, trademark or copyright of Seller or others. Please read our Operating Manuals carefully before installing and using these modules.

THE INFORMATION CONTAINED HEREIN AND SELLER'S PRODUCTS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR USE, OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF INFORMATION CONTAINED HEREIN AND SELLER'S PRODUCTS.

Liqui-Cel[®], SuperPhobic[®], MiniModule[®] and MicroModule[®] are registered trademarks of Membrana-Charlotte, A Division of Celgard, LLC.

Copyright © 2012 Membrana – Charlotte

All rights reserved.

(D69 Rev12)

Membrana - Charlotte
A Division of Celgard Inc.
13800 South Lakes Drive
Charlotte, North Carolina 28273
USA
Phone: (704) 587 8888
Fax: (704) 587 8610

Membrana GmbH
Oehder Strasse 28
42289 Wuppertal
Germany
Phone: +49 202 6099 - 658
Phone: +49 6126 2260 - 41
Fax: +49 202 6099 - 750

Membrana - Japan
Poly-pore K. K.
Shinjuku Mitsui Building, 27F
1-1, Nishishinjuku 2-chome
Shinjuku-ku, Tokyo 163-0427
Japan
Phone: 81 3 5324 3361
Fax: 81 3 5324 3369

MEMBRANA
A POLYPOR COMPANY

www.liqui-cel.com



ISO 9001
ISO 14001