

CSM NF MEMBRANE, The approved Nanofiltration membrane in the whole world.

## NE8040-90


*Nanofiltration membrane element with high monovalent ion rejection*

<b>Product Specifications</b>	Permeate Flow rate <sup>1)</sup> :	7,500 GPD (28,4 m <sup>3</sup> /day)
	Monovalent Ion Rejection (NaCl) <sup>1)</sup> :	85~95 %
	Divalent Ion Rejection (MgSO <sub>4</sub> ) <sup>2)</sup> :	99.5 %
	Effective Membrane Area :	400 ft <sup>2</sup> (37.2 m <sup>2</sup> )

1. The stated performance is initial data taken after 30 minutes of operation based on the following monovalent test conditions; 2,000 mg/L NaCl solution at 75 psig (0.5 MPa) applied pressure, 15 % recovery, 77 °F (25 °C) and pH 6.5~7.0.
2. The stated performance is initial data taken after 30 minutes of operation based on the following divalent test conditions; 2,000 mg/L MgSO<sub>4</sub> solution at 75 psig (0.5 MPa) applied pressure, 15 % recovery, 77 °F (25 °C) and pH 6.5~7.0.
3. Permeate Flow rate for individual elements may vary but will be no more than 15 % below the value shown.
4. Minimum MgSO<sub>4</sub> rejection 99.0 %
5. Effective membrane area may vary within 3 %.
6. All elements are vacuum sealed in a polyethylene bag containing 1.0 % SBS (Sodium bisulfite) solution and packaged individually in a cardboard box.

<b>Product Description</b>	Membrane Type :	Thin-film Composite
	Membrane Material :	PA (Polyamide)
	Membrane Surface Charge :	Negative
	Element Configuration :	Spiral-Wound, FRP wrapping

<b>Product Dimensions</b>	A =	40 inch (1,016 mm)
	B =	8.0 inch (203 mm)
	C =	1.12 inch (28 mm)

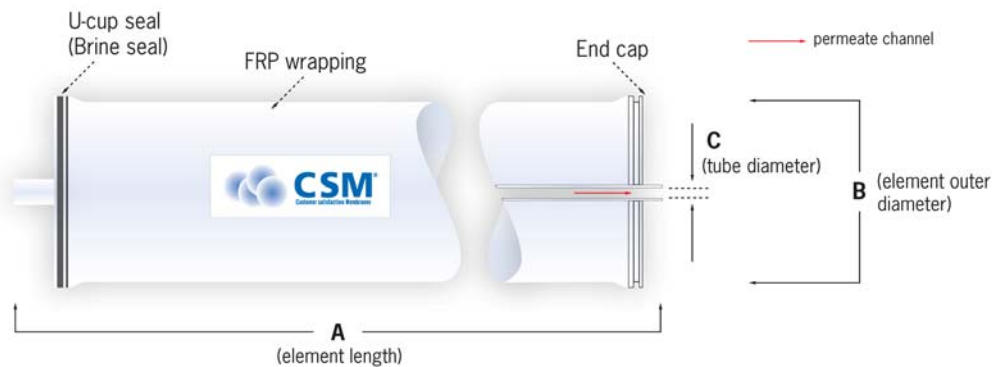


1. One interconnector (coupler) would be supplied for each membrane element.
2. All CSM membrane elements fit nominal 8.0-inch (203 mm) I.D. pressure vessel.
3. Outer feature may vary as design revisions take place.

### Features

- CSM NE90 elements with 90 % monovalent ion rejection and more than 99 % rejection of divalent ions are useful for water softening, removing endocrine disruption chemicals from drinking water and also food processing.

### Organic Rejection Characteristics

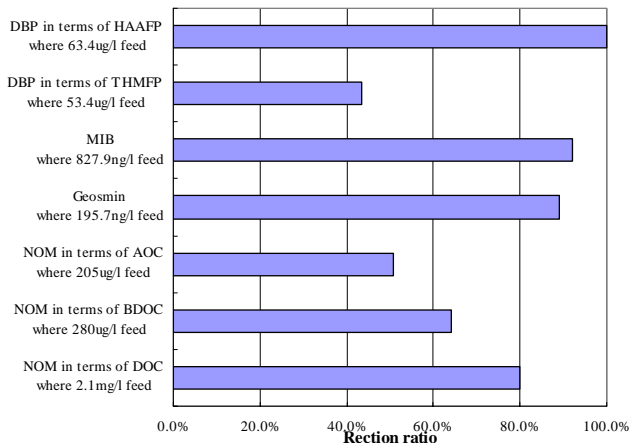

DBP (Di-butyl-phthalate), HAAFP (haloacetic acid formation potential), THMFP (THM Formation Potential), THM (Trihalomethane), MIB (methyl isoborneol), NOM (Natural organic matter), BDOC (biodegradable dissolved organic carbon), DOC (Dissolved organic carbon)

### Conditions for Handling CSM in general

- Customers must keep the element boxes dry at room temperature to prevent them from freezing and damages from heat. If the polyethylene bag is broken, a new protective solution has to be added to the RO membrane element and the element has to be repackaged air-tight to prevent from biological growth.
- Keep elements moist at all times after initial wetting
- Permeate water obtained from first hour of operation should be discarded in order to flush the protective solution in the elements.
- CSM elements should be immersed in a protective solution during storage, shipping or system shutdowns to prevent biological growth and freeze damage. The standard storage solution contains one (1) weight percent sodium bisulfite or sodium metabisulfite (food grade). For short term storage of one week, one (1) weight percent sodium metabisulfite solution is adequate for inhibiting biological growth.
- The customer is fully responsible for the effects of incompatible chemicals on elements. Their use will void the element limited warranty.

### Application Data

#### Operating Limits

- Max. Pressure drop / Element 15 psi (0.1 MPa)
- Max. Pressure drop / 240" vessel 60 psi (0.42 MPa)
- Max. Operating pressure 600 psi (4.14 MPa)
- Max. Feed flow rate 66 gpm (15.0 m<sup>3</sup>/hr)
- Min. Concentrate flow rate 16 gpm (3.6 m<sup>3</sup>/hr)
- Max. Operating temperature 113 °F (45 °C)
- Operating pH range 3.0 ~ 10.0
- CIP pH range 2.0 ~ 11.0
- Max. Turbidity 1.0 NTU
- Max. SDI (15 min) 5.0
- Max. Free Chlorine concentration 0.1 mg/L

#### Design Guideline for Various Water Source

- Waste water (SDI < 5) 8 ~ 12 gfd
- Waste water pretreated by UF (SDI < 3) 10 ~ 14 gfd
- Seawater, open intake (SDI < 5) 7 ~ 10 gfd
- High salinity well water (SDI < 3) 8 ~ 12 gfd
- Surface water (SDI < 5) 12 ~ 16 gfd
- Surface water (SDI < 3) 13 ~ 17 gfd
- Well water (SDI < 3) 13 ~ 17 gfd
- RO/UF permeate (SDI < 1) 21 ~ 30 gfd

#### Saturation Limits for Salts

- CaSO<sub>4</sub> 230 % saturation
- SrSO<sub>4</sub> 800 % saturation
- BaSO<sub>4</sub> 6,000 % saturation
- SiO<sub>2</sub> 100 % saturation

Above values are saturation limit at the tail end of the membrane elements for each sparingly soluble salts with proper scale inhibitor.

#### CaCO<sub>3</sub> Scaling potential limits as LSI or SDSI

- Without scale inhibitor < -0.2
- LSI (SDSI) with SHMP < +0.5
- LSI (SDSI) with special inhibitor<sup>1</sup> < +1.5
- SDSI with any inhibitor < +0.5

1. Special inhibitor means one of approved organic inhibitors. It should be approved from real plant for more than three years.



#### Woongjin Chemical Co.,Ltd.

For more information about CSM membranes;  
12<sup>th</sup> Floor ASPO Bd., 254-8 Kongduk-Dong, Mapo-Gu,  
SEOUL 121-710, KOREA  
TEL +82-2-3279-7514, +82-2-3279-7367  
FAX +82-2-3279-7088  
Email [csm@wjchemical.co.kr](mailto:csm@wjchemical.co.kr)  
Website <http://www.csmfilter.com>